


MODEL 610026 LASER LIGHT SHEET OPTICS WITH CONTINUOUS ADJUSTABLE FOCUSING

APPLICATION NOTE LLS-001 (US)

Model 610026 Light Sheet Optics

The Modular 610026 light sheet optics has the capability to allow continuously adjustable focal length between 300 mm to 4000 mm, generating an extremely uniform beam thickness from the laser. The light sheet optics can handle high power laser beams up to 500 mJ, with beam diameter of up to 9 mm. This capability allows Model 610026 to be used in the study of large wind tunnels with long focusing distance.

Two cylindrical lenses are provided with the Modular light sheet optics. The cylindrical lens diverges the incident laser beam in one direction, creating a flat sheet of light. The divergence is controlled by the focal length of the lens (i.e., the shorter the focal length, the faster the sheet diverges). The cylindrical lenses can also be used in combination (for example the -25 and -14) to give additional divergences, up to 50 degrees.

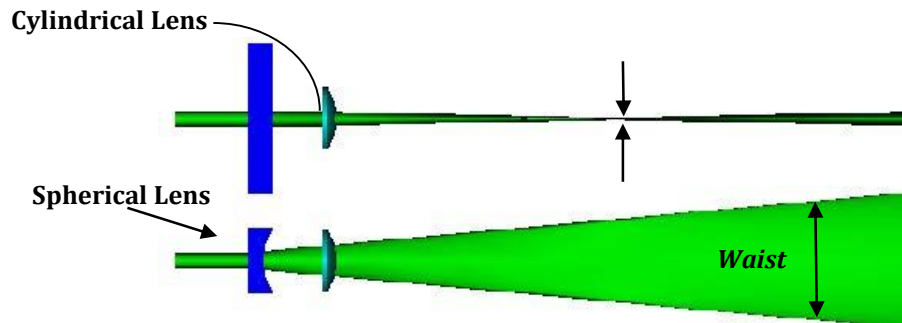

Specifications

Light Sheet Thickness	Variable beam waist. Light sheet thickness is dependent on the laser beam thickness and the focal lens used.
Sheet Focusing Range	300 mm to 4000 mm (Dependent on beam diameter and beam divergence)
Optical Transmission	> 95%
Optical Wavelength	400 nm to 550 nm Suitable for use on Nd:YAG (532nm) and YLF lasers (527 nm)
Maximum Input Beam Diameter	9 mm
Polarization	Not affected by the polarity of the laser beam coming out from the laser
Cylindrical Lenses	-15 mm Lens—25 degrees divergence -25 mm Lens—14 degrees divergence
Dimensions	Diameter—Ø 0.05 m Length—0.08 m

*Specifications are subject to change without notice.

Dimensions of the light sheet thickness and height at the Waist position at some discrete focusing locations (based on beam diameter of 5 mm)

Spherical	100 mm			200 mm			500 mm			1000 mm			2000 mm			
	Cyl (mm)	t (µ)	h (mm)	D (°)	t (µ)	h (mm)	D (°)	t (µ)	h (mm)	D (°)	t (µ)	h (mm)	D (°)	t (µ)	h (mm)	D (°)
-12.7	10.6	41	19.9	21	88	23.3	53	230	25.2	106	466	25.9	212	939	26	
-25	10.6	18	6.9	21	42	10.3	53	114	12	106	234	13	212	474	13	
-50				21	18	3.4	53	54	5.5	106	114	6.2	212	234	6.5	
-100							53	24	2.1	106	54	2.7	212	114	3.1	
-200							53	9	0.34	106	24	1.0	212	54	1.4	

t: Thickness of the light sheet at the waist in µm

h: Height of the light sheet at the waist in mm

D: Divergence of the light sheet in degrees



UNDERSTANDING, ACCELERATED

TSI Incorporated – Visit our website www.tsi.com for more information.

USA	Tel: +1 800 874 2811	India	Tel: +91 80 67877200
UK	Tel: +44 149 4 459200	China	Tel: +86 10 8219 7688
France	Tel: +33 1 41 19 21 99	Singapore	Tel: +65 6595 6388
Germany	Tel: +49 241 523030		