

# MICROMANOMETERS

## MODELS AXD610 AND AXD620

### Model AXD610

The AXD610 is an easy to use, handheld digital Micromanometer for fast, accurate and reliable pressure measurement. It can also calculate velocity.

### Model AXD620

The AXD620 is a rugged, compact, comprehensive Micromanometer that measures pressure, and calculates velocity and volumetric flow rate. It can be used with Pitot tubes to measure velocity and then calculate flow rates with user-input duct size and shape. Premium features make it ideal for HVAC, environmental safeguards, commissioning, process control and system balancing.



Model AXD620 shown with optional pitot probe

### Features and Benefits

#### (Model AXD610)

- + Measure differential and static pressure from -15 to +15 in. H<sub>2</sub>O (-3735 to +3735 Pa)
- + Calculate and display velocity when using a Pitot tube


### Added Features and Benefits

#### (Model AXD620)

- + Calculates volumetric flow rate in duct from velocity and user-input duct size and shape
- + Preset up to 5 round and rectangular duct sizes
- + Preset up to 5 K factors
- + Record data points
- + Data logging with time and date stamp
- + Includes LogDat2™ downloading software
- + Programmable K factors

### Applications

- + HVAC commissioning and troubleshooting
- + Testing and balancing
- + Pitot tube duct traverses
- + Static pressure measurements
- + Differential pressure measurements

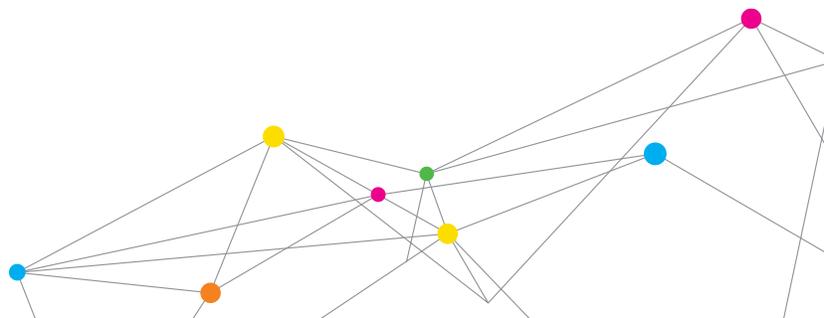

# SPECIFICATIONS

## MICROMANOMETERS MODELS AXD610, AXD620

### Static/Differential Pressure

Range <sup>1</sup>	-15 to +15 in. H <sub>2</sub> O (-28.0 to +28.0 mm Hg, -3735 to +3735 Pa)
Accuracy	±1% of reading ±0.005 in. H <sub>2</sub> O (±1 Pa, ±0.01 mm Hg)
Resolution	0.001 in. H <sub>2</sub> O (0.1 Pa, 0.01 mm Hg)

### Velocity From a Pitot Tube

Range <sup>2</sup>	250 to 15,500 ft/min (1.27 to 78.7 m/s)
Accuracy <sup>3</sup>	±1.5% at 2,000 ft/min (10.16 m/s)
Resolution	1 ft/min (0.1 m/s)

### Duct Size (AXD620)

Dimensions	1 to 500 inches in increments of 0.1 in. (2.5 to 1,270 cm in increments of 0.1 cm)
------------	---

### Volumetric Flow Rate (AXD620)

Range	Actual range is a function of velocity, pressure, duct size, and K factor
-------	--

### Instrument Temperature Range

Operating	40 to 113°F (5 to 45°C)
Storage	-4 to 140°F (-20 to 60°C)

### Data Storage Capabilities (AXD620 only)

Range	12,700+ samples and 100 test IDs
-------	----------------------------------

### Logging Interval (AXD620 only)

1 second to 1 hour

### Time Constant (AXD620 only)

User selectable

### External Meter Dimensions

3.3 in x 7.0 in x 1.8 in (8.4 cm x 17.8 cm x 4.4 cm)

### Meter Weight with Batteries

0.6 lbs. (0.27 kg)

### Power Requirements

AXD620	Four AA-size batteries or optional AC adapter
AXD610	Four AA-size batteries

	AXD610	AXD620
Differential and static pressure	+	+
Velocity with pitot tube	+	+
Sample statistics		+
Volumetric flow rate		+
Actual and standard velocity		+
Variable time constant		+
LogDat2 downloading software		+
K factor		+
Certificate of Calibration	+	+

<sup>1</sup> Overpressure range = 190 in. H<sub>2</sub>O (7 psi, 360 mmHg, 48 kPa).

<sup>2</sup> Pressure velocity measurements are not recommended below 1,000 ft/min (5 m/s).

<sup>3</sup> Accuracy is a function of converting pressure to velocity. Conversion accuracy improves when actual pressure values increase.

Specifications subject to change without notice.



Alnor Products, TSI Incorporated

Visit our website at [www.alnor.com](http://www.alnor.com) for more information.

<b>USA</b>	<b>Tel:</b> +1 800 874 2811	<b>China</b>	<b>Tel:</b> +86 10 8219 7688
<b>India</b>	<b>Tel:</b> +91 80 67877200	<b>Singapore</b>	<b>Tel:</b> +65 6595 6388